


## DWDM Mux & Demux Simplex

ATOP's DWDM module is compact and has the properties of low insertion loss, low crosstalk, and wide pass bandwidth high isolation, which enables users to establish a low cost bi-directional optical communication system

### Product Features

- Low Insertion Loss
- High Isolation
- Low PDL
- Compact Design
- Good channel-to-channel uniformity
- Wide Operating Wavelength: from 1260nm to 1620nm
- Wide Operating Temperature: from -40 to 85°C

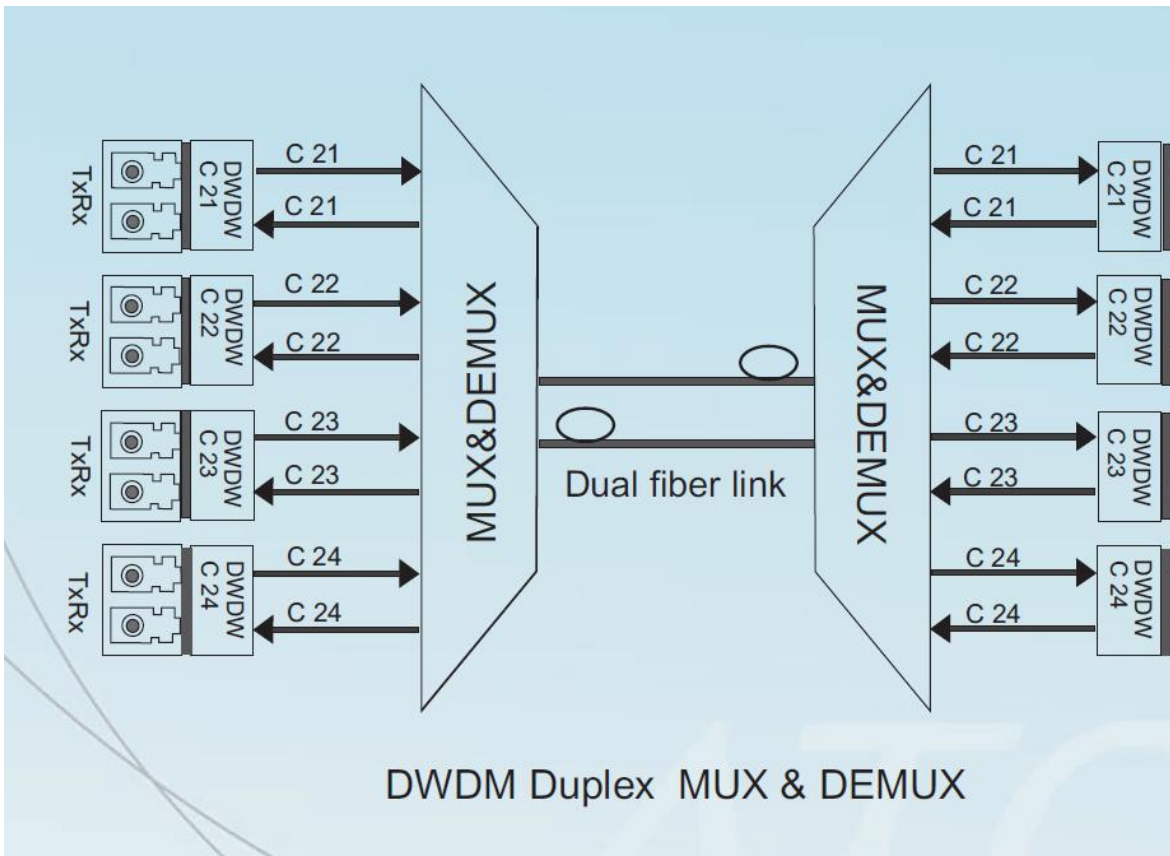



## Application

DWDM System	CATV Links
PON Networks	

## Compliance

Telcordia GR-1209-CORE-2001	RoHS
Telcordia GR-1221-CORE-1999	ITU-T G.694.1

## DWDM Specifications

### 1\*N DWDM Mux/Demux Module

Parameters							
Channel Space (GHz)		10			200		
Channel Number		1	1*8	1*16	1*4	1*8	1*16
Center Wavelength (nm)		ITU					
Center Wavelength Accuracy (nm)		±			± 0.1		
Channel Passband (@-0.5dB) (nm)		0.2			0.5		
Fiber Type		SMF-28e with 900um loose tube or customer					
IL (dB)		1.8	3.0	4.0	1.7	2.9	3.8
Passband Ripple (dB)		0.3	0.4	0.5	0.35	0.4	0.5
Isolation (dB)	Adjacent Channel	25			28		
	Non-Adjacent Channel	40					
PDL(dB)		0.2					
PMD(ps)		0.1					
RL (dB)		45					
Directivity (dB)		50					
Maximum Optical Power (mw)		300					
Operating Temperature (°C)		-40~					
Storage Temperature (°C)		-40~					
BOX Package(mm)		100*8	120*80*10	40*114*1	100*80*1	120*80*1	140*114*18
LGX Package		1U,2U					
19" Rack mount Package		1U					



Connects fiber to your home

**ATOP Corporation**

AP-DWDM-4MDD-1RU

Notes:

- 1.Specified without connectors.
- 2.Add an additional 0.2dB loss per connector.

## For More Information

ATOP Technology

Web:[www.atoptechnology.com](http://www.atoptechnology.com)

Email:[sales@atoptechnology.com](mailto:sales@atoptechnology.com)

Tel: 86-755-86674946