

## 1.25Gb/s SFP BIDI Transceiver

### APSB54123xxSB2

#### ■ Product Features

- ✓ Up to 1.25Gb/s data links
- ✓ Single SC connector
- ✓ Hot-pluggable SFP footprint
- ✓ 1490nm DFB laser transmitter
- ✓ RoHS compliant and Lead Free
- ✓ Up to 120Km on 9/125um SMF
- ✓ Metal enclosure for lower EMI
- ✓ Single +3.3V power supply
- ✓ Power dissipation <800mW (0~70°C), <1000mW (-40~85°C)
- ✓ Commercial and industrial operating temperature optional
- ✓ SFP MSA SFF-8074i Compliant



#### ■ Applications

- ✓ Gigabit Ethernet

#### ■ General

ATOP's APSB54123xxSB2 Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The SFP transceivers are high performance, cost effective modules supporting Gigabit Ethernet and 120km transmission distance with SMF. They are RoHS compliant and lead-free.

#### ■ Product Selection

| Part Number   | Operating temperature | DDMI |
|---------------|-----------------------|------|
| APSB54123CXS2 | Commercial            | No   |
| APSB54123CDS2 | Commercial            | Yes  |
| APSB54123IXS2 | Industrial            | No   |
| APSB54123IDS2 | Industrial            | Yes  |



## ■ Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Single SC Receptacle: compatible with IEC 61000-4-2
- Immunity compatible with IEC 61000-4-3
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2
- RoHS compliant with RoHS 2 (2011/65/EU)

## ■ Pin Descriptions

| Pin | Symbol      | Name/Description   | Ref. |
|-----|-------------|--|------|
| 1   | VeeT        | Transmitter Ground Common with Receiver Ground)                | 1    |
| 2   | TX Fault    | Transmitter Fault.   |      |
| 3   | TX Disable  | Transmitter Disable. Laser output disabled on high or open.    | 2    |
| 4   | MOD_DEF(2)  | Module Definition 2. Data line for Serial ID.                  | 3    |
| 5   | MOD_DEF(1)  | Module Definition 1. Clock line for Serial ID.                 | 3    |
| 6   | MOD_DEF(0)  | Module Definition 0. Grounded within the module.               | 3    |
| 7   | Rate Select | No connection required   |      |
| 8   | LOS         | Loss of Signal indication. Logic 0 indicates normal operation. | 4    |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-         | Receiver Inverted DATA out. AC Coupled                         |      |
| 13  | RD+         | Receiver Non-inverted DATA out. AC Coupled                     |      |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | VccR        | Receiver Power Supply  |      |
| 16  | VccT        | Transmitter Power Supply                                       |      |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+         | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-         | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |

**Notes:**

1. Circuit ground is internally isolated from chassis ground.
  2. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable <0.8V.
  3. Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V.
- MOD\_DEF (0) pulls line low to indicate module is plugged in.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.



**Pin-out of Connector Block on Host Board**

■ **Recommend Circuit Schematic**





■ **Absolute Maximum Ratings**

| Parameter              | Symbol | Min  | Typ | Max  | Unit | Ref. |
|------------------------|--------|------|-----|------|------|------|
| Maximum Supply Voltage | Vcc    | -0.5 |     | +4.0 | V    |      |
| Storage Temperature    | TS     | -40  |     | +85  | °C   |      |
| Operating Humidity     | RH     | 0    |     | 85   | %    |      |

■ **Recommended Operating Conditions**

| Parameter                   | Symbol | Min  | Typ  | Max  | Unit | Ref.       |
|-----------------------------|--------|------|------|------|------|------------|
| Power Supply Voltage        | Vcc    | 3.13 | 3.30 | 3.47 | V    |            |
| Power Supply Current        | Icc    |      |      | 250  | mA   | Commercial |
|                             | Icc    |      |      | 300  | mA   | Industrial |
| Case Operating Temperature  | Tc     | 0    |      | +70  | °C   | 1          |
|                             | Tl     | -40  |      | +85  |      | 2          |
| Data Rate(Gigabit Ethernet) |        |      | 1.25 |      | Gbps |            |
| 9/125um G.652 SMF           | Lmax   |      |      | 120  | km   |            |

**Notes:**

1. For commercial class product.
2. For industrial class product.

■ **Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)**

| Parameter                     | Symbol  | Min       | Typ | Max      | Unit | Ref. |
|-------------------------------|---------|-----------|-----|----------|------|------|
| <b>Transmitter</b>            |         |           |     |          |      |      |
| Input differential impedance  | Rin     | -         | 100 | -        | Ω    | 1    |
| Single ended data input swing | Vin, pp | 250       | -   | 1200     | mV   |      |
| TX Disable-High               | -       | Vcc – 1.3 | -   | Vcc      | V    |      |
| TX Disable-Low                | -       | Vee       | -   | Vee+ 0.8 | V    |      |
| TX Fault-High                 | -       | Vcc-0.5   | -   | Vcc      | V    |      |
| TX Fault-Low                  | -       | Vee       | -   | Vee+0.5  | V    |      |
| <b>Receiver</b>               |         |           |     |          |      |      |



|                                |          |           |     |         |    |   |
|--------------------------------|----------|-----------|-----|---------|----|---|
| Single ended data output swing | Vout, pp | 300       | 400 | 800     | mV | 2 |
| Data output rise time          | tr       | -         | -   | 300     | ps | 3 |
| Data output fall time          | tf       | -         | -   | 300     | ps | 3 |
| LOS-High                       | -        | Vcc – 0.5 | -   | Vcc     | V  |   |
| LOS-Low                        | -        | Vee       | -   | Vee+0.5 | V  |   |

**Notes:**

1. AC coupled.
2. Into 100 ohm differential termination.
3. 20 – 80 %

■ **Optical Characteristics (TOP=25°C, Vcc=3.3 Volts)**

| Parameter                   | Symbol           | Min  | Typ  | Max  | Unit | Ref. |
|-----------------------------|------------------|------|------|------|------|------|
| <b>Transmitter</b>          |                  |      |      |      |      |      |
| Output Opt. Power           | PO               | 0    | -    | +5   | dBm  | 1    |
| Optical Wavelength          | $\lambda$        | 1530 | 1550 | 1570 | nm   |      |
| Spectral Width(-20dB)       | $\Delta \lambda$ | -    | -    | 1    | nm   |      |
| Side Mode Suppression Ratio | SMSR             | 30   | -    | -    | dB   |      |
| Optical Rise/Fall Time      | tr/tf            | -    | -    | 260  | ps   | 2    |
| Total Jitter                | TJ               | -    | -    | 0.35 | UI   |      |
| Optical Extinction Ratio    | ER               | 9    | -    | -    | dB   |      |
| <b>Receiver</b>             |                  |      |      |      |      |      |
| RX Sensitivity @1.25Gb/s    | SENS             | -    | -    | -30  | dBm  | 3, 4 |
| Receiver Overload           | -                | -9   | -    | -    | dBm  |      |
| Optical Center Wavelength   | $\lambda_C$      | 1470 | 1490 | 1510 | nm   |      |
| LOS De-Assert               | LOSD             | -    | -    | -34  | dBm  |      |
| LOS Assert                  | LOSA             | -45  | -    | -    | dBm  |      |
| LOS Hysteresis              | -                | 0.5  | -    | 5    | dB   |      |


**Notes:**

1. Class 1 Laser Safety.
2. Unfiltered, 20-80%. Complies with Gigabit Ethernet eye masks when filtered.
3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.

4. Measured with PRBS  $2^7-1$  at  $10^{-12}$  BER.

### ■ Mechanical Specifications


ATOP's Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA), dimensions are in mm.

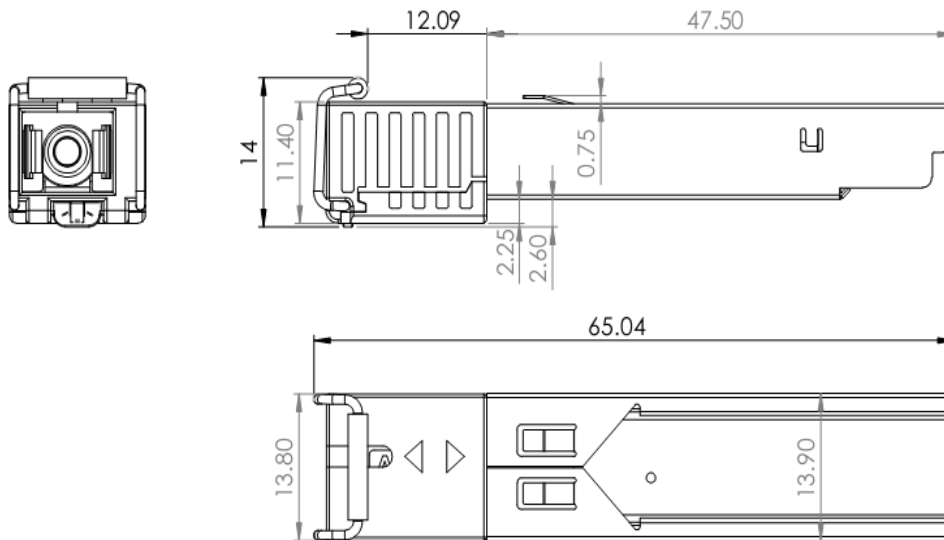

**APSB54123xxSB2**

### ■ EEPROM Information

EEPROM memory map specific data field description is as below:

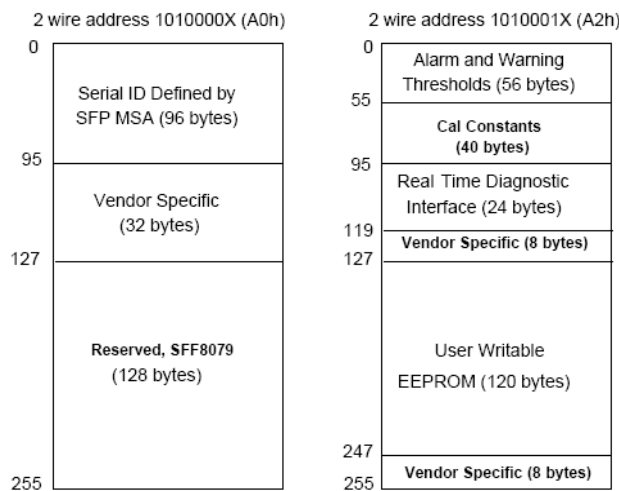



## ■ Digital Diagnostic Monitoring Interface

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

| Parameter    | Range            | Accuracy | Calibration |
|--------------|------------------|----------|-------------|
| Temperature  | 0 to +70°C (C)   | ±3°C     | Internal    |
|              | -40 to +85°C (I) |          |             |
| Voltage      | 2.97 to 3.63V    | ±3%      | Internal    |
| Bias Current | 0 to 100mA       | ±10%     | Internal    |
| TX Power     | 0 to +5dBm       | ±3dB     | Internal    |
| RX Power     | -30 to -9dBm     | ±3dB     | Internal    |

## ■ Revision History

| Revision   | Initiated  | Reviewed | Approved  | DCN           | Release Date  |
|------------|------------|----------|-----------|---------------|---------------|
| Version1.0 | vangpeiyun | sunbin   | dingzheng | New Released. | July 29, 2016 |

## ■ For More Information

### ATOP Corporation

Tel: +86-755-86674946

Fax: +86-755-86296723

Email: [sales@atoptechnology.com](mailto:sales@atoptechnology.com)

Web: [www.atoptechnology.com](http://www.atoptechnology.com)